

Bosslyn

Guangzhou Bosslyn Electric CO., LTD
Address: 3F Building B No. 17 Hanxi Rd. Hanxi, Zhongcun
Town, Panyu District, Guangzhou, China 511495
Web: www.bosslyn.com <http://www.bosslyn.cn/>
Skype: alexbosslyn TEL: 0086-20-3463 2339
Email: alex@bosslyn.com, b22346320@163.com



Bosslyn

Bosslyn



Perfectly fit for
all GFCI and USB sockets.


Bosslyn

Zhangjiagang City Barep Electrical Technology Co., Ltd is a professional manufacturer who is researching, developing, producing, and selling for high reliability, widely used GFCI-Ground Fault Circuit Interrupter for USA, Canada, Mexico market.

Barep General Electric and all products are made under  certificate, our company owns: ISO 9001: 2008, and the products are widely used in the living room, kitchen, bathroom and various power tools like Generators. Products are widely export to North America, South America, Canada and other countries.

And we believe quality is everything, we closely follow the instruction from our clients and try to develop more NEMA specification items for civil and industrial products, to meet the needs of the foreign markets.



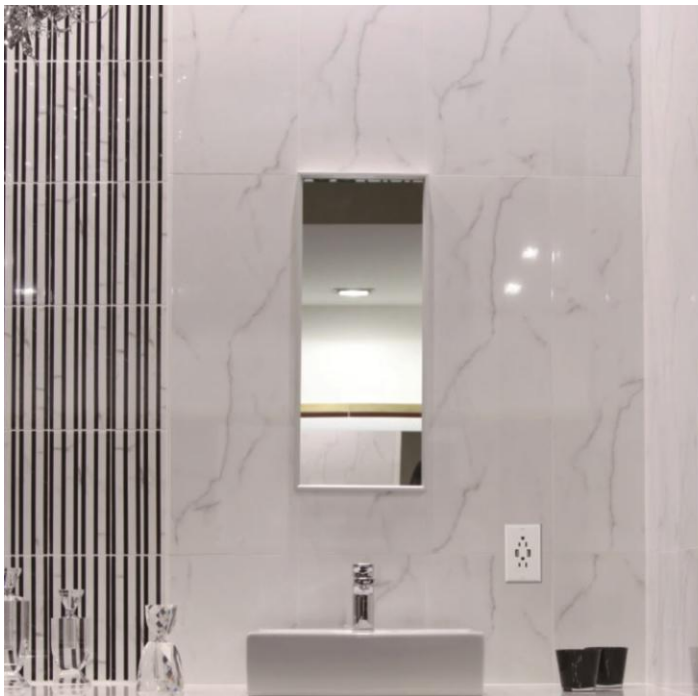

USB SOCKET 15A / 20A

Product application:

- Good heat dissipation
- Design of bottom grid, good cooling
- Super high impact resistance and thermal stability
- Cover pans are made of high quality polycarbonate
- Chemical corrosion resistance
- Fingerprint-resistant zinc plated mounting brackets
- Mechanical life
- Unloaded plug >5000sec
- Meet the standard
- UL498CSA-C22.2 NO.42 USB1.0/2.0/3.0
- Housing material flame retardant grades UL94-V2

- 3 -



Bosslyn



B2USB-15
USB 15A receptacle



B2USB-20
USB 20A receptacle



B2USB-15TR
TR USB15A receptacle



B2USB-20TR
TR USB20A receptacle

Meet the standard:



- UL498CSA-C22.2 NO.42 USB1.0/2.0/3.0
- Housing material flame retardant grades UL94-V2

Specifications, Electrical performance, Ambient temperature:

- Rated working current: 15A / 20A
- Rated working voltage: 125V
- Power frequency: 60Hz
- USB Voltage and current: 5VDC 4A / 2.1A
- Wire specifications: #14-#10AWG
- USB Compatible products: USB1.0/2.0/3.0 Includes Apple products
- Electric strength: Pressure resistance 1500V 50Hz Duration 1 Min
- Working temperature: -20°C ~ 60°C
- Insulation resistance: > 50MΩ (DC500V)

- 4 -

Bosslyn

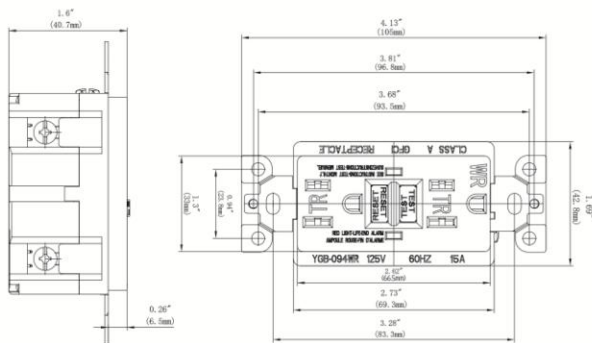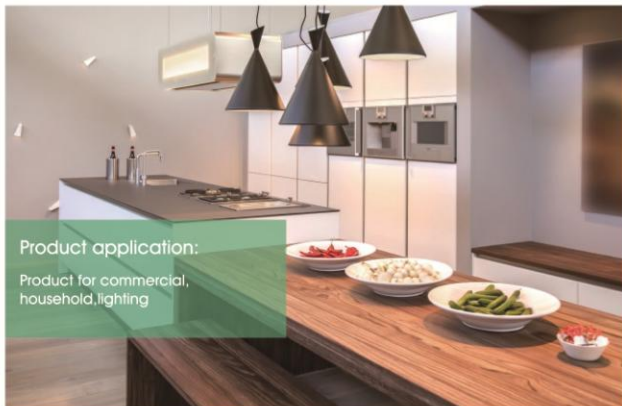

Meet the standard:

- UL498CSA-C22.2 NO.42
- Housing material flame retardant grades UL94-V2

- 5 -



Bosslyn



BGFCI-15
GFCI 15A 1 LIGHT



BGFCI-15TR
GFCI 15A 1 LIGHT



BGFCI-20
GFCI 20A 1 LIGHT TR




BGFCI-20TR
GFCI 20A 1 LIGHT TR



Specifications, Electrical performance, Ambient temperature:

- Rated working current: 15A / 20A
- Rated working voltage: 125V
- Power frequency: 60Hz
- Tripping threshold: 5mA Tripping time < 25ms
- Surge current: 6000V / 3000A 6000V / 10KA
- Electric strength: Pressure resistance 1500V 50Hz Duration 1 Min
- Working temperature: -35°C ~ 66°C
- Insulation resistance: > 50MΩ (DC500V)
- Short-circuit current: 10KA

- 6 -

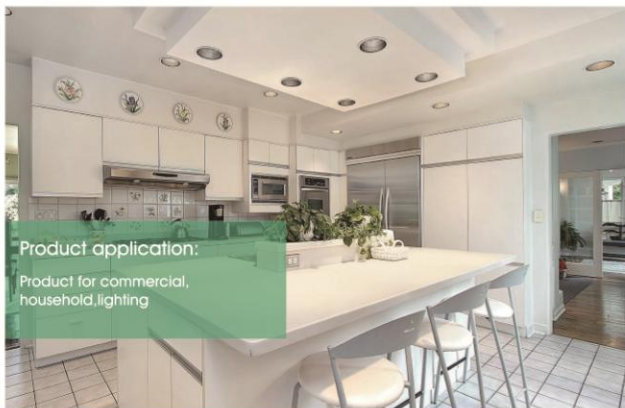

Product application:

Product for commercial, household, lighting




BK-01S
1 LEVER SWITCH (1 WAY / 2 WAY)



BK-02S
2 GANG SWITCH



BK-03S
1 GANG SWITCH (1 WAY / 2 WAY)

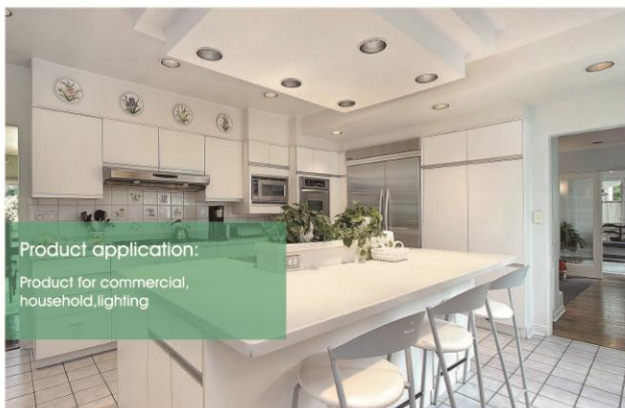

Product application:

Product for commercial, household, lighting



BR-15HP
(clip wiring)



BK-03S
1 GANG SWITCH (1 WAY / 2 WAY)



BR-15
(clip wiring)



BR-20
(Screw wiring)



BR-15S
(clip wiring)



BR-20S
(clip wiring)

Meet the standrad:

- UL20
- Shell material flame retardant grade UL94-V0

Specifications, Electrical performance, Amboent temperature:

- Rated working current:15AMax
- Rated working voltage:120Vac
- Power frequency:60Hz
- Electric strength:Pressure resistance 1500V 50Hz Duration 1 Min
- Working temperature:-30OC~70OC
- Insulation resistance:> 10MQ (DC500V)



BR-615
(clip wiring)



BR-620
(Screw wiring)



HD-109R
(clip wiring)



HD-109S
(clip wiring)

Meet the standrad:

- UL20
- Shell material flame retardant grade UL94-V0

Specifications, Electrical performance, Amboent temperature:

- Rated working current:15AMax
- Rated working voltage:120Vac
- Power frequency:60Hz
- Electric strength:Pressure resistance 1500V 50Hz Duration 1 Min
- Working temperature:-30OC~70OC
- Insulation resistance:> 10MQ (DC500V)

Durable nylon
material for outdoors
water proof cover.



BP-013
enclosure box



BP-014
enclosure box



BP-014
enclosure box



BP-016
enclosure box



BP-018
enclosure box



BP-016
enclosure box



BW-001
water proof cover



BW-002
water proof cover



BW-003
water proof cover



BW-004
water proof cover



BP-010
receptacle cover plate



BP-002
2 receptacle cover plate



BP-008
blank cover plate



BP-009
1 gang cover plate



BP-004
2 gang cover plate



BP-005
3 gang cover plate



BP-011
1 lever switch cover plate



BP-012
2 lever switch cover plate



BP-009S
1 gang screwless cover plate



BP-004S
2 gang screwless cover plate



BP-005S
3 gang screwless cover plate



BP-006S
4 gang screwless cover plate